


REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
A	CREATION	GI	GI	1/23/2011

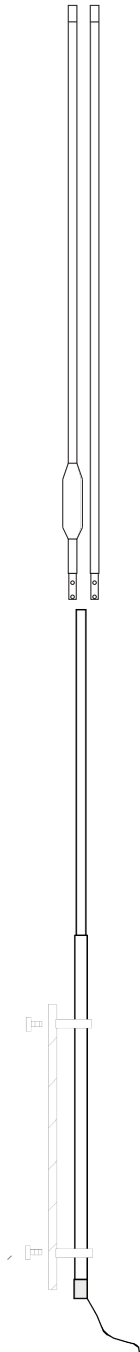

Colour	Standard is Black. Optional White.
HF Marine Band	2-30 MHz
Length	4.6 metres (15 ft)
Pattern	Omnidirectional
Polarisation	Vertical
Base Diameter	20mm (¾ in)
Frequency Range	Pre-tuned to frequency, or unloaded 2-30 MHz with suitable ATU
Wind Loading	3.5 kg at 100 km/h (7.7 lbs at 60 mph) 5.9 kg at 130 km/h (13 lbs at 81 mph)
Power Capability	500W PEP for unloaded top sections, 300W PEP for normal loaded top sections; higher power to order
Mountings	Two 63mm (2.5 in) nylon clamp type insulators, 35mm (1.375 in) diameter, threaded to take an M10 bolt (not supplied); insulator spacing not less than 45cm (1.5 ft)
Connection	Silicone insulated flexible cable tail 2m long (6.5 ft) 56/0.3 tinned copper; length should not exceed that provided for correct operation on the higher frequencies
Packed Weight	3 kg (6.6 lbs) with mountings

UNLESS OTHERWISE SPECIFIED DIMENSIONS : mm ANGLES : d.		<b>NEARSON INC.</b>	
CUSTOMER N°	TITLE :	Marine antenna for vessels	
FILE N°			
	SIZE	<b>NMO-01-0015</b>	REV
	A4		A
SCALE : N.D.			SHEET 1 of 1