
REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
Α	CREATION	GI	GI	7/13/2011

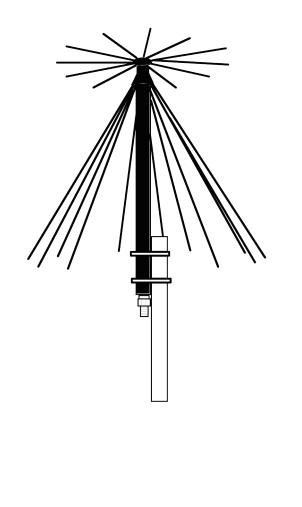

ColourStarFrequency Range225PolarisationVertGain+2dVSWR<2:'</td>Impedance (output)500Power Capability100ConnectionN tyOverall Dimensions410Mounting Pole Length340notWind Survival160Weight910

Standard is Bronze Olive. Option other colours to order. 225-400 MHz Vertical linear +2dBi minimum over frequency range <2:1 over frequency range  $50\Omega$  (nominal) 100w CW, 400w PEP N type coaxial connector (female) in base 410mm (16 in) (h) x 400mm (15.7 in) (dia) 340mm (13.4 in), longer to order; mounting clamps not included 160 km/h (100mph) 910g (2 lbs); packed: 1.2kg (2.6 lbs)

UNLESS OTHERWISE SPECIFIED DIMENSIONS : mm ANGLES : d.	NEARSON INC.			
CUSTOMER N°	TITLE : Broadband Omnidirectional UHF Airband System			
	SIZE A4 scale : n.d.	NMO-01-0037	REV A Prod. Doc. SHEET 1 of 1	

This drawing is the property of Nearson Inc, and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from Nearson Inc.