
REV	MODIFICATIONS	DRAWN BY	CHECKED BY	DATE
Α	CREATION	HE	HE	7/13/2011

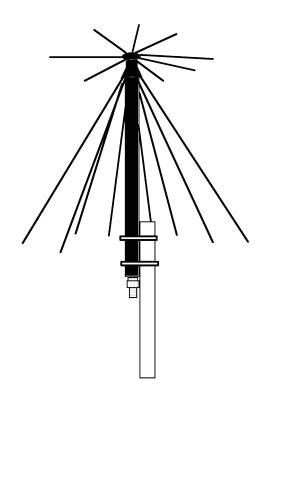

Colour	Standa
Frequency Range	VHF 1
Polarisation	Vertica
Gain	up to +
VSWR	<2.5:1
Impedance (output)	50Ω (r
Power Capability	100w (
Connection	N type
Overall Dimensions	750 (2
Mounting Pole Length	740mr
- •	include
Wind Survival	160 kn

Standard is Bronze Olive. Option other colours to order. VHF 113-174 MHz and UHF 225-400 MHz Vertical linear up to +2.5dBi over frequency range <2.5:1 over frequency range  $50\Omega$  (nominal) 100w CW, 400w PEP N type coaxial connector (female) in base 750 (29.5 in) H x 840mm (33 in) Dia. 740mm (29.1 in), longer to order; mounting clamps not included 160 km/h (100mph) 2.1g (4.6 lbs); packed: 3.0kg (6.6 lbs)

UNLESS OTHERWISE SPECIFIED DIMENSIONS : mm ANGLES : d.			
CUSTOMER N° FILE N°	TITLE <sup>:</sup> Broadband Omnidirectional 2 Band Airband System( VHF/UHF)		
	SIZE A4 scale : n.d.	NMO-01-0039	REV A Prod. Doc. SHEET 1 of 1

, and is issued on the condition that it is not copied or disclosed to any third party without prior written consent from

Weight