




HIGH FLEXIBLE WIRES



WIRES
CABLES

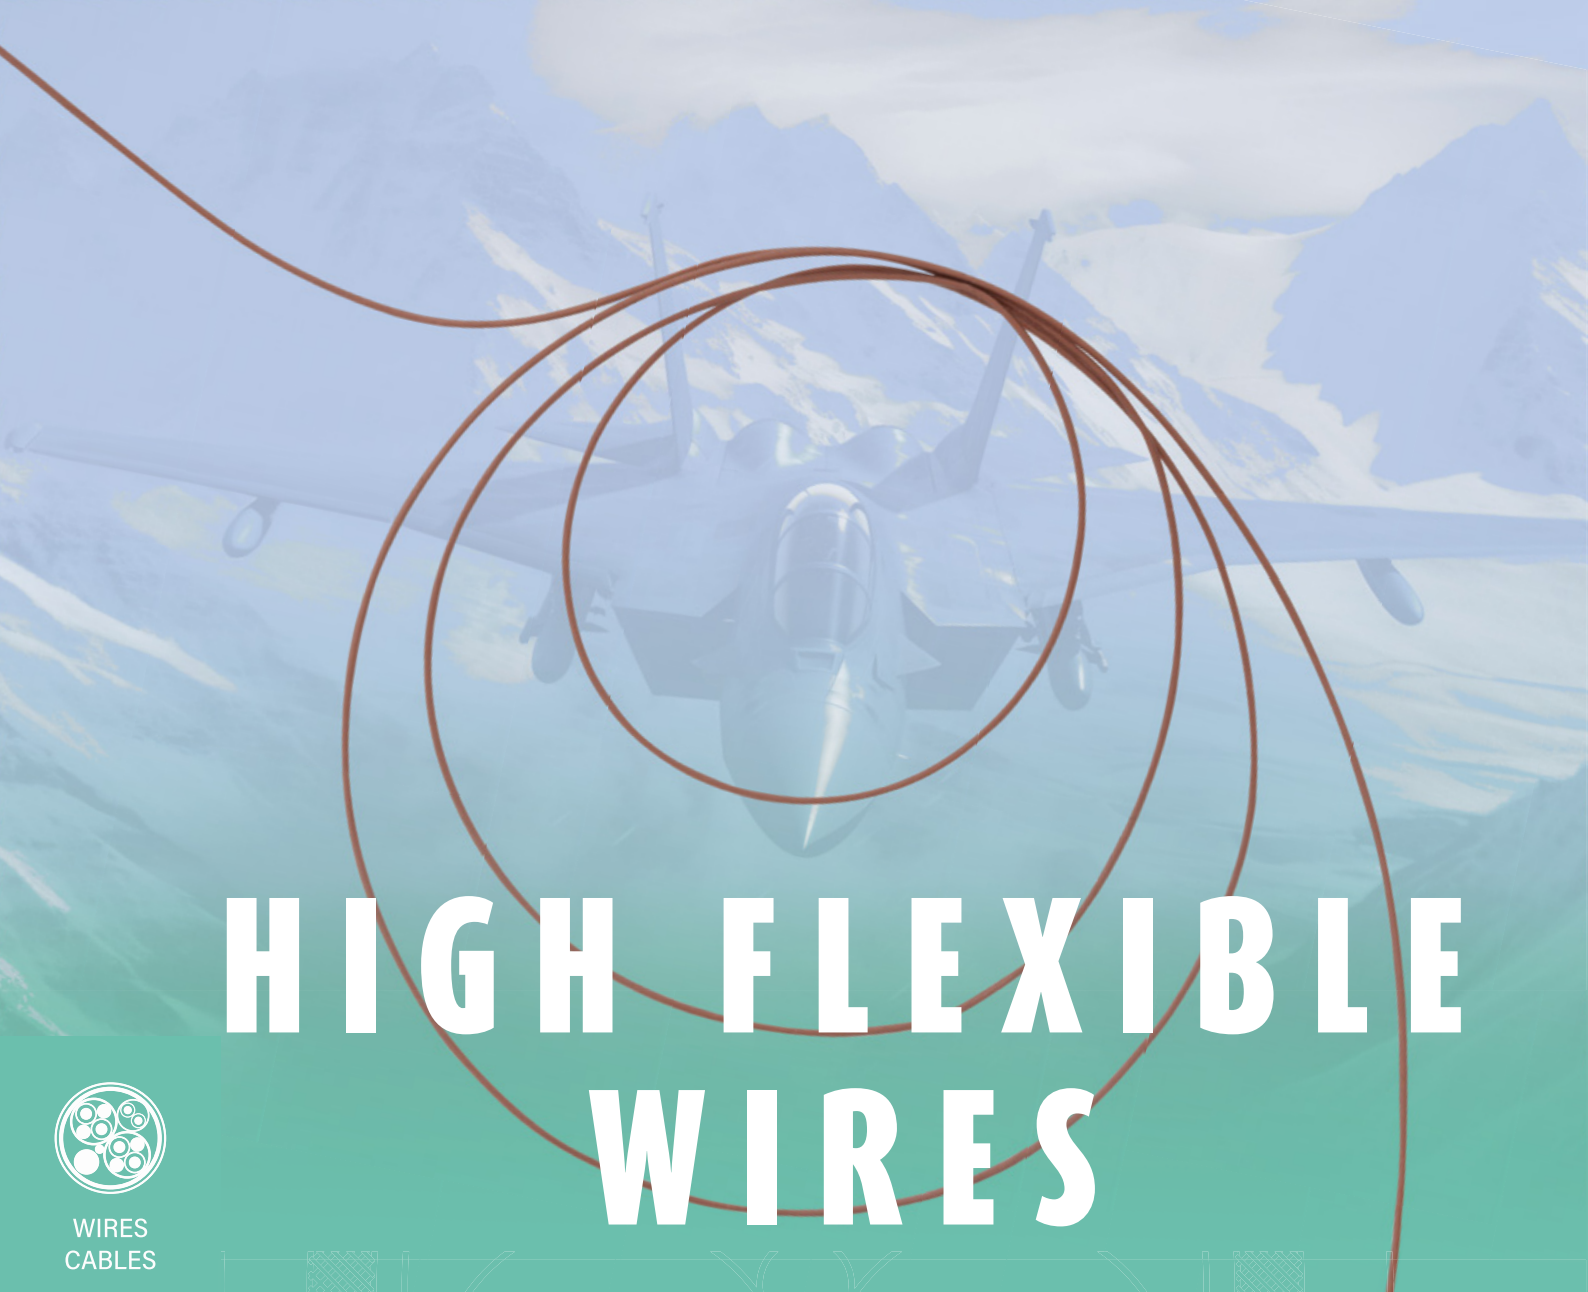

axon' 

CONTENTS

HIGH FLEXIBLE WIRES

GENERAL INFORMATION

EXPERTISE IN CABLING ENGINEERING	2
TECHNICAL SOLUTION FOR ASSEMBLIES	2
COLOUR CODE	3


CONSTRUCTION

HIGH FLEXIBLE VERSIONS

MULTISTRANDED SINGLE WIRES: FW XX/XX.....	4
TWISTED PAIRS: 2 FW XX/XX.....	5
TWISTED TRIPLES: 3 FW XX/XX.....	6
TWISTED QUADS: 4 FW XX/XX	7
SHIELDED & JACKETED SINGLE CORE CABLES: FW XX/XX STK1.....	8
SHIELDED & JACKETED TWISTED PAIRS WITH DRAIN: FW XX/XX STK2 + DW	9

LONG FLEXLIFE VERSIONS

SINGLE WIRES: LFW XX/XX.....	10
TWISTED PAIRS: 2 LFW XX/XX.....	11
SHIELDED AND JACKETED PAIRS: LFW XX/XX STK2.....	12

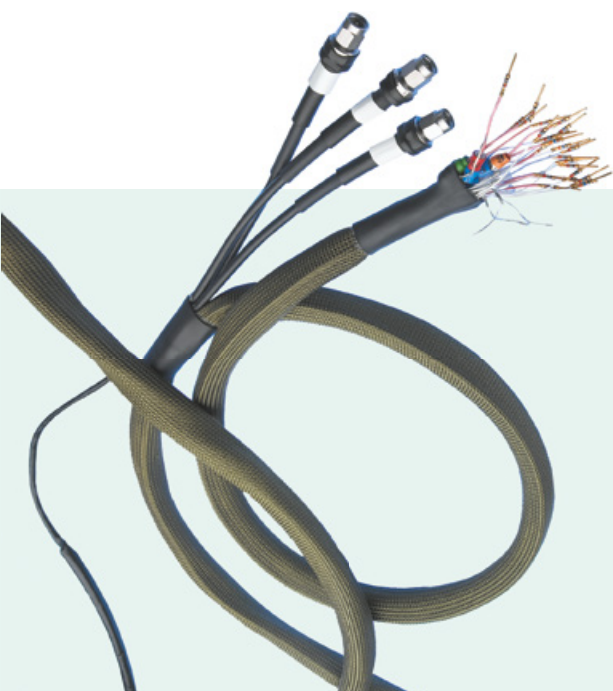

THIS CATALOGUE IS INTENDED AS A GUIDE TO HELP SELECTION OF AXON' PRODUCTS.

THE INFORMATION IN THIS CATALOGUE IS ACCURATE TO THE BEST OF OUR KNOWLEDGE AT TIME OF GOING TO PRINT, HOWEVER, AXON' CANNOT BE HELD LIABLE FOR ANY ERRORS MADE AS A RESULT, INFORMATION CONTAINED HEREIN.

CHANGES AND MODIFICATIONS CAN BE MADE TO THIS BROCHURE AT ANY TIME WITHOUT PRIOR NOTICE.

DESIGN BY NAD STUDIO - PHOTOS: AXON' CABLE - FREEPIK.



GENERAL INFORMATION

AXON' CABLE is a world leader in specialist interconnect systems. The company excels in the design and manufacture of wires, cables, terminated harnesses, connectors and integrated systems for high technology applications including aeronautics, military, space, oil and gas exploration, medical electronics, research centres, automotive and consumer electronics.

Flexible Wires (FW) are designed for applications with restricted space and challenging routing. With their optimized construction, Long Flexible Wires (LFW) are particularly suitable for dynamic applications including surveillance system, radar detection, gimbals and moving optronic systems (see pages 10 to 12).



EXPERT IN CABLING ENGINEERING

AXON' CABLE is able to design the whole cabling network. Axon' engineers assist customers with the most appropriate tools including simulation software (INVENTOR, CATIA, SEE ELECTRICAL HARNESS) and co-design in all the development stages : idea, concept, prototypes, industrialisation, volume ramp-up and mass production. Axon' will bring you cost-effective solutions based on Lean Engineering and Lean Manufacturing principles.

TECHNICAL SOLUTIONS FOR ASSEMBLIES

When designing ruggedised systems for harsh or demanding environments, commonly with severe or extreme operating conditions, the available space is often very limited. This in turn makes for challenging routing for the system interconnect, making very small bend radii a pre-requisite for the wires or cables. Where this is the case, **highly flexible wires and cables** can greatly ease mechanical installation and resulting interconnect life. To meet these requirements AXON' can build complete interconnect systems using a proprietary range of highly flexible multi-conductor wires and cables called **Flexible Wires (FW)**. AXON's in-house conductor design and manufacture makes it possible to produce, as standard, FW conductors with up to 119 strands. As a comparison, typical equipment wires are made with 7 or 19-strand conductors. Silver plated copper or high strength copper alloy conductors ensure that the AXON' FW cables are able to consistently meet high performance standards in applications where flexibility and flexlife are critical.

FW cables are available in various configurations including singles, twisted pairs and shielded composite versions, all of them made with high quality conductors and insulating materials in compliance with RoHS requirements.

The AXON' FW cables can also be integrated inside larger bundles of different wires and cables including signal, power, RF and optical fibres. **Long flexlife versions** have been designed for improved flexlife thanks to a thicker FEP insulation.




CABLING MACHINE

COLOUR CODE

PRIMARY WIRES ARE CODED ACCORDING TO THE TABLE BELOW

CODE	NATURAL	BLACK	BROWN	RED	ORANGE	YELLOW	GREEN	BLUE	PURPLE	GREY	WHITE
	A	B	C	D	E	F	G	H	J	K	L

FURTHER INFORMATION: as the cable insulation is thin, the jacket colour is quite transparent. In that cas, the colours may be close to each other (ex: red, orange).

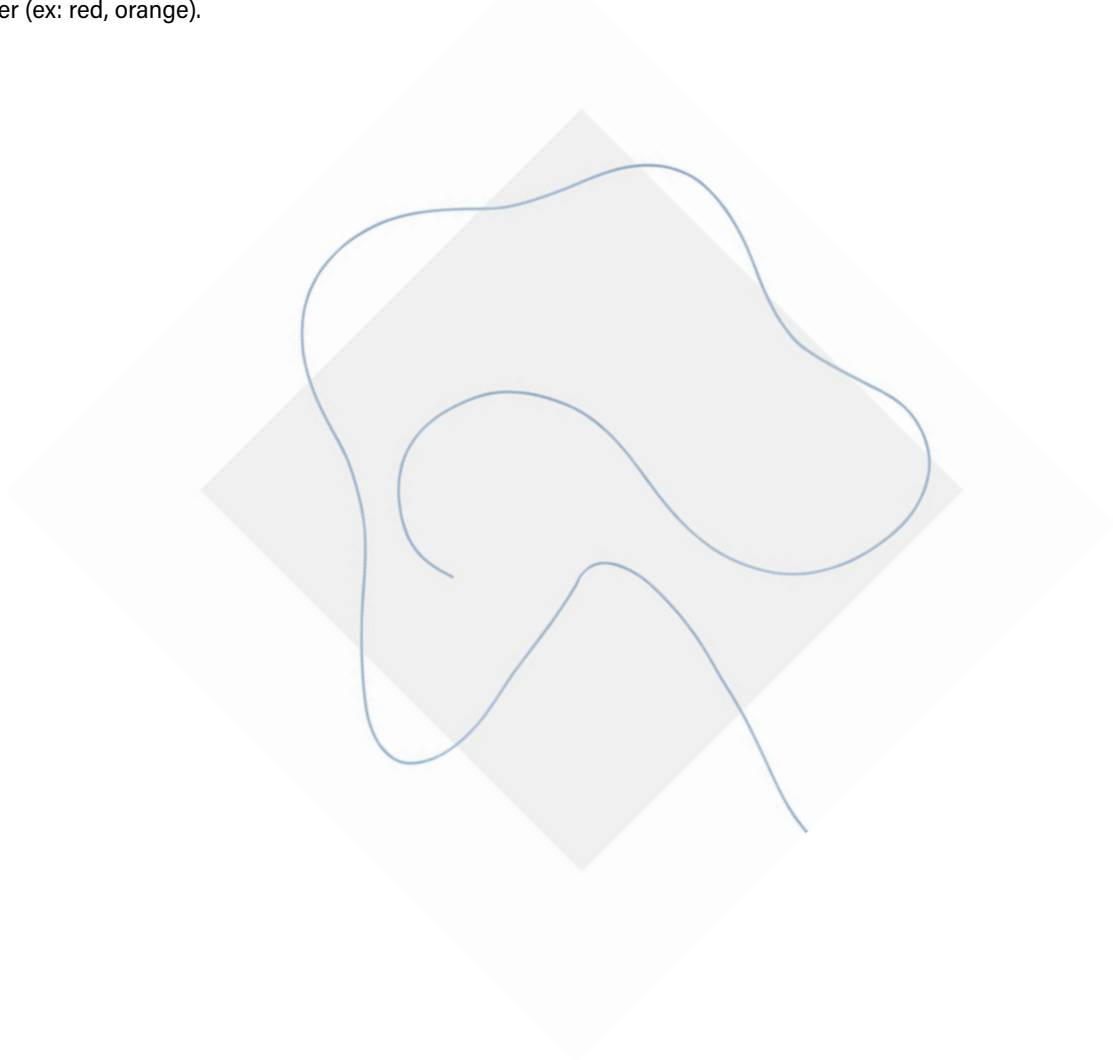



HIGH FLEXIBLE MULTISTRANDED SINGLE WIRES TYPE FW xx/xx


Insulation: FEP

Operating temperature: -60°C to +150°C

Voltage rating: 200 Vac

Standard colours (stock): white for FW 22/41 to FW 34/50, black or white for FW 26/44.

Other colours on request, see colour code page 3.

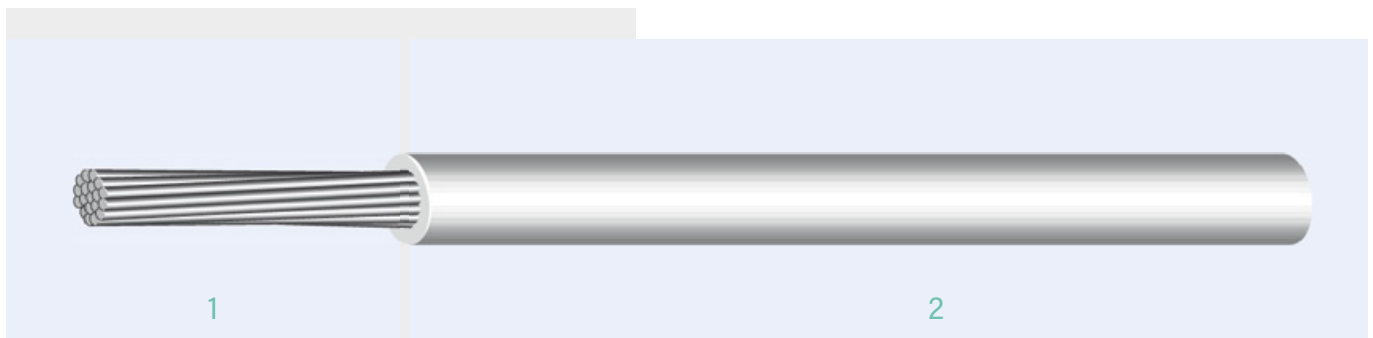

Construction

1. Conductor: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
2. Insulation: thin wall extruded FEP

Physical characteristics

AXON' REFERENCE	CONDUCTOR						INSULATED WIRE	
	Material	AWG	Strand number	Strand Ø (mm)	Nominal area (mm ²)	Nominal resistance (Ω/ 100m)	Nominal Ø (mm)	Approx. weight (g/m)
FW 22/41	SPC	22	72	0.07	0.277	6.25	0.85	2.90
FW 24/44	SPC	24	105	0.05	0.206	9	0.73	2.10
FW 26/44	SPC	26	63	0.05	0.124	14.5	0.62	1.30
FW 28/48	SHT	28	119	0.031	0.090	26.2	0.52	0.90
FW 30/50	SHT	30	105	0.025	0.052	42.7	0.42	0.60
FW 32/50	SHT	32	70	0.025	0.034	64	0.38	0.40
FW 34/50	SHT	34	42	0.025	0.021	106.8	0.32	0.30

Identification code

FW	XX	/	XX
Flexible wire	Conductor size (AWG)		Strand size (AWG)

(*) SPC: SILVER PLATED COPPER - (**) SHT: SILVER HARD TIN

HIGH FLEXIBLE TWISTED PAIRS TYPE 2 FW xx/xx


Insulation: FEP

Operating temperature: -60°C to +150°C

Voltage rating: 200 Vac

Standard colours (stock): white for FW 22/41 to FW 34/50, black or white for FW 26/44.

Other colours on request, see colour code page 3.

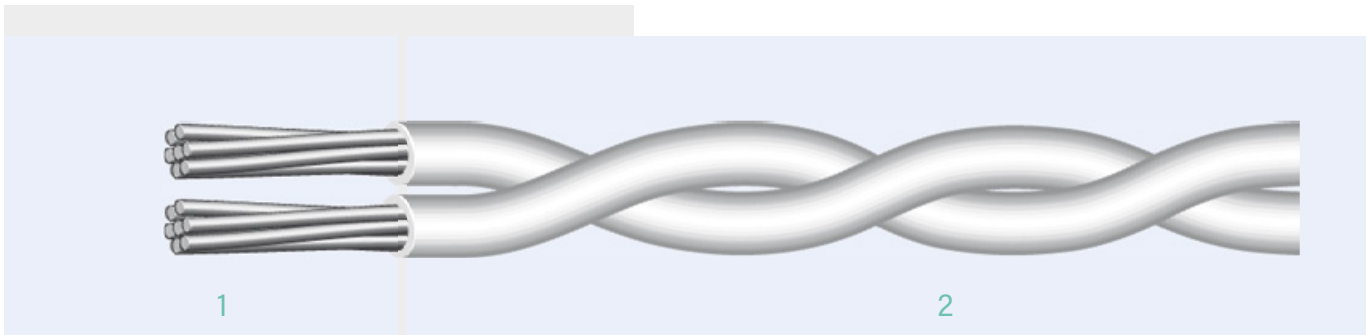

Construction

- Conductor: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
- Insulation: thin wall extruded FEP

Physical characteristics

AXON' REFERENCE	CONDUCTOR						INSULATED WIRE	TWISTED PAIRS		
	Material	AWG	Strand number	Strand Ø (mm)	Nominal area (mm²)	Nominal resistance (Ω/ 100m)	Nominal Ø (mm)	Nominal Ø (mm)	Approx. weight (g/m)	Approx. lay lenght (mm)
2 FW 22/41	SPC	22	72	0.07	0.277	6.25	0.85	0.85	5.9	20
2 FW 24/44	SPC	24	105	0.05	0.206	9	0.73	0.73	4.2	18
2 FW 26/44	SPC	26	63	0.05	0.124	14.5	0.62	0.62	2.7	15
2 FW 28/48	SHT	28	119	0.031	0.090	26.2	0.52	0.52	2.0	12
2 FW 30/50	SHT	30	105	0.025	0.052	42.7	0.42	0.42	1.2	10
2 FW 32/50	SHT	32	70	0.025	0.034	64	0.38	0.38	0.85	9
2 FW 34/50	SHT	34	42	0.025	0.021	106.8	0.32	0.32	0.5	8

Identification code

2	FW	XX	/	XX
Number of wires	Flexible wire	Conductor size (AWG)		Strand size (AWG)

(*) SPC: SILVER PLATED COPPER - (**) SHT: SILVER HARD TIN



HIGH FLEXIBLE TWISTED TRIPLES TYPE 3 FW xx/xx


Insulation: FEP

Operating temperature: -60°C to +150°C

Voltage rating: 200 Vac

Standard colours (stock): white for FW 22/41 to FW 34/50, black or white for FW 26/44.

Other colours on request, see colour code page 3.

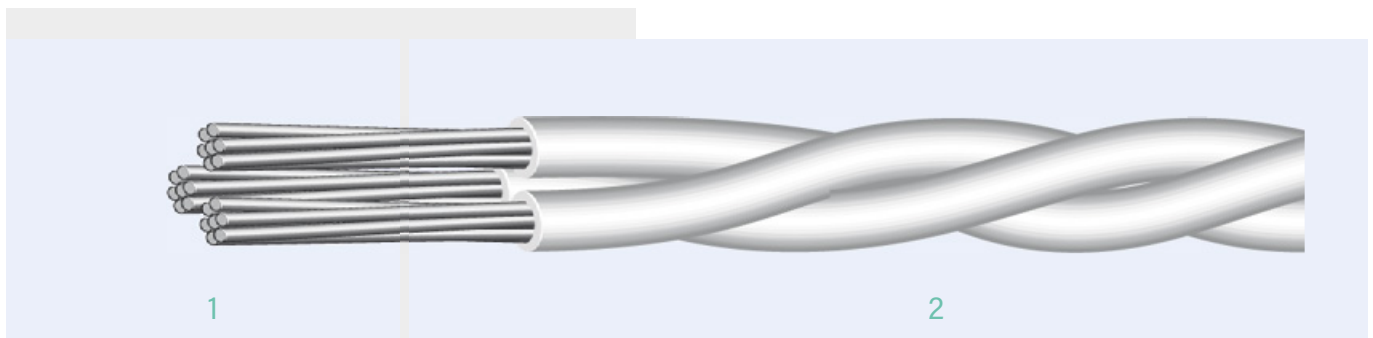

Construction

1. Conductor: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
2. Insulation: thin wall extruded FEP

Physical characteristics

AXON' REFERENCE	CONDUCTOR						INSULATED WIRE	TWISTED TRIPLES		
	Material	AWG	Strand number	Strand Ø (mm)	Nominal area (mm²)	Nominal resistance (Ω/ 100m)	Nominal Ø (mm)	Nominal Ø (mm)	Approx. weight (g/m)	Approx. lay lenght (mm)
3 FW 22/41	SPC	22	72	0.07	0.277	6.25	0.85	1.83	8.9	22
3 FW 24/44	SPC	24	105	0.05	0.206	9	0.73	1.57	6.4	19
3 FW 26/44	SPC	26	63	0.05	0.124	14.5	0.62	1.33	4.0	16
3 FW 28/48	SHT	28	119	0.031	0.090	26.2	0.515	1.11	3.0	13
3 FW 30/50	SHT	30	105	0.025	0.052	42.7	0.42	0.90	1.8	11
3 FW 32/50	SHT	32	70	0.025	0.034	64	0.38	0.82	1.3	10
3 FW 34/50	SHT	34	42	0.025	0.021	106.8	0.32	0.69	0.8	8

Identification code

3	FW	XX	/	XX
Number of wires	Flexible wire	Conductor size (AWG)		Strand size (AWG)

(*) SPC: SILVER PLATED COPPER - (**) SHT: SILVER HARD TIN

HIGH FLEXIBLE TWISTED QUADS TYPE 4 FW xx/xx


Insulation: FEP

Operating temperature: -60°C to +150°C

Voltage rating: 200 Vac

Standard colours (stock): white for FW 22/41 to FW 34/50, black or white for FW 26/44.

Other colours on request, see colour code page 3.

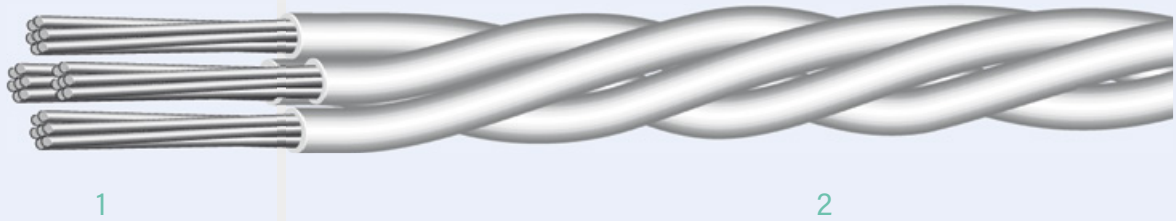

Construction

1. Conductor: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
2. Insulation: thin wall extruded FEP

Physical characteristics

AXON' REFERENCE	CONDUCTOR						INSULATED WIRE	TWISTED QUADS		
	Material	AWG	Strand number	Strand Ø (mm)	Nominal area (mm²)	Nominal resistance (Ω/ 100m)	Nominal Ø (mm)	Nominal Ø (mm)	Approx. weight (g/m)	Approx. lay lenght (mm)
4 FW 22/41	SPC	22	72	0.07	0.277	6.25	0.85	2.05	11.9	25
4 FW 24/44	SPC	24	105	0.05	0.206	9	0.73	1.76	8.5	21
4 FW 26/44	SPC	26	63	0.05	0.124	14.5	0.62	1.49	5.4	18
4 FW 28/48	SHT	28	119	0.031	0.090	26.2	0.52	1.24	4.0	15
4 FW 30/50	SHT	30	105	0.025	0.052	42.7	0.42	1.01	2.4	12
4 FW 32/50	SHT	32	70	0.025	0.034	64	0.38	0.92	1.7	11
4 FW 34/50	SHT	34	42	0.025	0.021	106.8	0.32	0.77	1.1	9

Identification code

4	FW	XX	/	XX
Number of wires	Flexible wire	Conductor size (AWG)		Strand size (AWG)

(*) SPC: SILVER PLATED COPPER - (**) SHT: SILVER HARD TIN



HIGH FLEXIBLE SHIELDED & JACKETED SINGLE CORE CABLES

TYPE FW xx/xx STK1


Insulation: FEP

Operating temperature: -60°C to +150°C

Voltage rating: 200 Vac

Standard colours (stock): white for FW 22/41 to FW 34/50, black or white for FW 26/44.

Other colours on request, see colour code page 3.

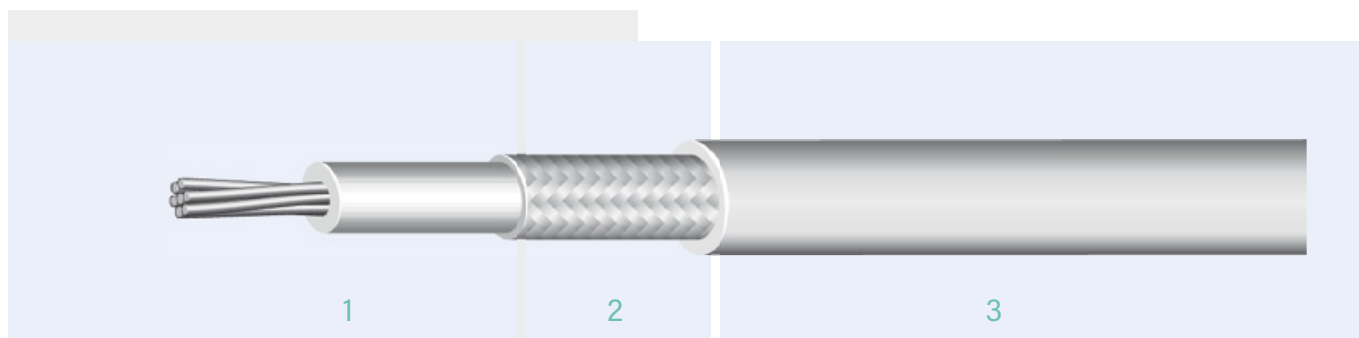

Construction

1. - Conductor: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
- Insulation: thin wall extruded FEP
2. Shielding: silver plated copper (SPC) or silver plated copper alloy (SHT**)
3. Outer jacket: thin wall extruded FEP

Physical characteristics

AXON' REFERENCE	PRIMARY WIRE		BRAIDED SHIELD		JACKET	
	Reference	Nominal Ø (mm)	Construction	Min. coverage (%)	Nominal outer Ø (mm)	Approx. weight (g/m)
FW 22/41 STK1	FW 22/41	0.85	16 x 4 x 0.05	80	1.17	4.60
FW 24/44 STK1	FW 24/44	0.73	16 x 4 x 0.05	80	1.05	3.75
FW 26/44 STK1	FW 26/44	0.62	16 x 3 x 0.05	80	0.94	2.60
FW 28/48 STK1	FW 28/48	0.52	16 x 3 x 0.05	80	0.84	2.25
FW 30/50 STK1	FW 30/50	0.42	16 x 3 x 0.05	80	0.74	1.84
FW 32/50 STK1	FW 32/50	0.38	16 x 2 x 0.05	80	0.70	1.30
FW 34/50 STK1	FW 34/50	0.32	16 x 2 x 0.05	80	0.64	1.15

Identification code

FW	XX	/	XX	ST	K	1
Flexible wire	Conductor size (AWG)		Strand size (AWG)	Standard braid	FEP	Number of wire

(*) SPC: SILVER PLATED COPPER - (**) SHT: SILVER HARD TIN

HIGH FLEXIBLE SHIELDED & JACKETED TWISTED PAIRS WITH DRAIN

TYPE FW xx/xx STK2+DW


Insulation: FEP

Operating temperature: -60°C to +150°C

Voltage rating: 200 Vac

Standard colours (stock): white for FW 22/41 to FW 34/50, black or white for FW 26/44.

Other colours on request, see colour code page 3.

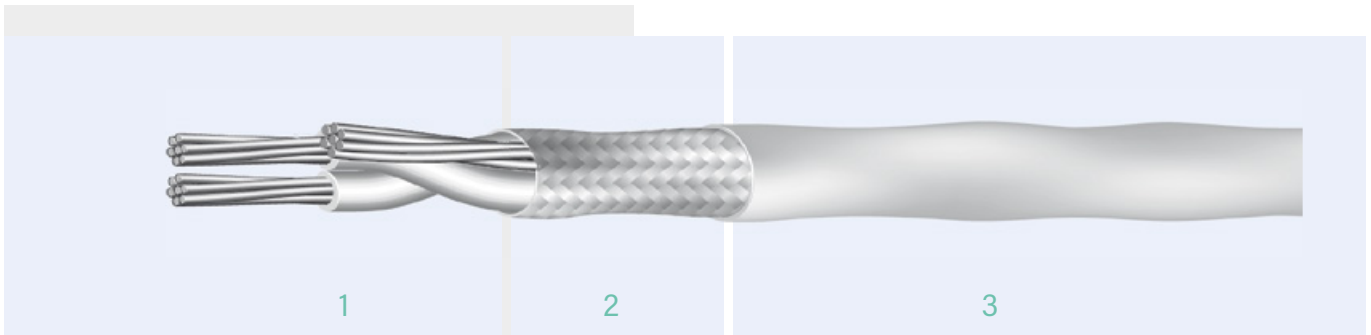

Construction

1. - Conductor: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
- Insulation: thin wall extruded FEP
- Drain wire: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
2. Shielding: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
3. Outer jacket: thin wall extruded FEP

Physical characteristics

AXON' REFERENCE	PRIMARY WIRE		DRAIN WIRE		BRAIDED SHIELD		JACKET	
	Reference	Nominal Ø (mm)	Material	AWG	Construction	Min. coverage (%)	Nominal outer Ø (mm)	Approx. weight (g/m)
FW 22/41 STK2 + DW	FW 22/41	0.85	SPC	22	16 x 8 x 0.05	80	2.02	12
FW 24/44 STK2 + DW	FW 24/44	0.73	SPC	24	16 x 7 x 0.05	80	1.78	9.2
FW 26/44 STK2 + DW	FW 26/44	0.62	SPC	26	16 x 6 x 0.05	80	1.59	6.4
FW 28/48 STK2 + DW	FW 28/48	0.52	SHT	28	16 x 5 x 0.05	80	1.36	4.96
FW 30/50 STK2 + DW	FW 30/50	0.42	SHT	30	16 x 5 x 0.05	80	1.22	3.8
FW 32/50 STK2 + DW	FW 32/50	0.38	SHT	32	16 x 4 x 0.05	80	1.08	2.9
FW 34/50 STK2 + DW	FW 34/50	0.32	SHT	34	16 x 4 x 0.05	80	1.02	2.43

Identification code

FW	XX	/	XX	ST	K	2	+ DW
Flexible wire	Conductor size (AWG)		Strand size (AWG)	Standard braid	FEP	Number of wire	Drain wire

(*) SPC: SILVER PLATED COPPER - (**) SHT: SILVER HARD TIN




LONG FLEXIBLE SINGLE WIRES TYPE LFW xx/xx

Insulation: FEP

Operating temperature: -60°C to +150°C

Voltage rating: 200 Vac

Standard colours: see colour code page 3.

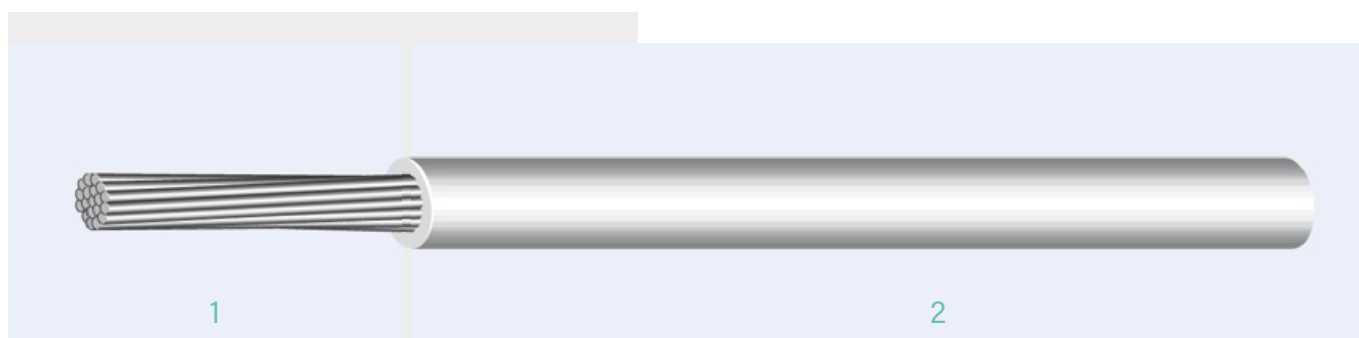

Construction

1. Conductor: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
2. Insulation: thin wall extruded FEP

Physical characteristics

AXON' REFERENCE	CONDUCTOR						INSULATED WIRE	
	Material	AWG	Strand number	Strand Ø (mm)	Nominal area (mm ²)	Nominal resistance (Ω/ 100m)	Nominal Ø (mm)	Approx. weight (g/m)
LFW 22/41	SPC	22	72	0.07	0.277	6.25	0.91	3.05
LFW 24/44	SPC	24	105	0.05	0.206	9	0.78	2.30
LFW 26/44	SPC	26	63	0.05	0.124	14.5	0.66	1.39
LFW 28/48	SHT	28	119	0.031	0.090	26.2	0.56	1.04
LFW 30/50	SHT	30	105	0.025	0.052	42.7	0.46	0.65
LFW 32/50	SHT	32	70	0.025	0.034	64	0.41	0.47
LFW 34/50	SHT	34	42	0.025	0.021	106.8	0.36	0.32

Identification code

LFW	XX	/	XX
Long Flexible Wire	Conductor size (AWG)		Strand size (AWG)

(*) SPC: SILVER PLATED COPPER - (**) SHT: SILVER HARD TIN




LONG FLEXIBLE TWISTED PAIRS TYPE 2 LFW xx/xx

Insulation: FEP

Operating temperature: -60°C to +150°C

Voltage rating: 200 Vac

Standard colours: see colour code page 3.

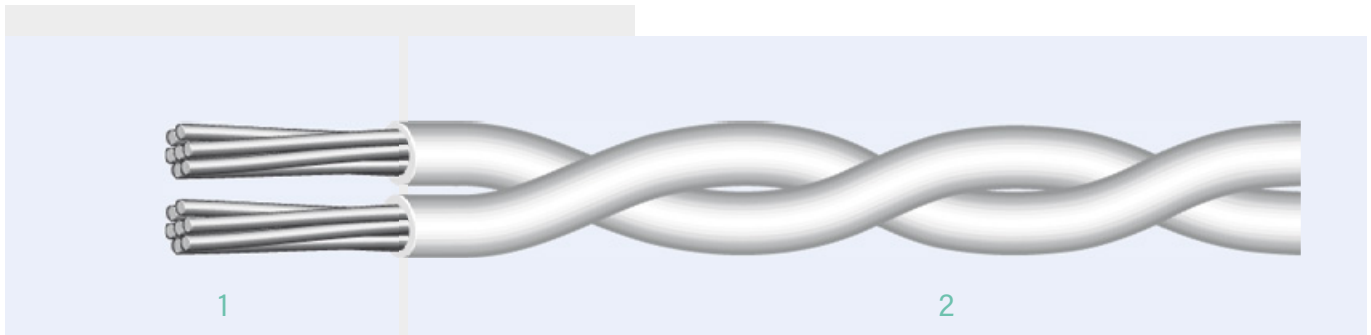

Construction

1. Conductor: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
2. Insulation: thin wall extruded FEP

Physical characteristics

AXON' REFERENCE	CONDUCTOR						INSULATED WIRE	TWISTED PAIRS		
	Material	AWG	Strand number	Strand Ø (mm)	Nominal area (mm²)	Nominal resistance (Ω/ 100m)	Nominal Ø (mm)	Nominal Ø (mm)	Approx. weight (g/m)	Approx. lay length (mm)
2 LFW 22/41	SPC	22	72	0.07	0.277	6.25	0.91	1.82	6.41	20
2 LFW 24/44	SPC	24	105	0.05	0.206	9	0.78	1.56	4.83	18
2 LFW 26/44	SPC	26	63	0.05	0.124	14.5	0.66	1.32	2.92	16
2 LFW 28/48	SHT	28	119	0.031	0.090	26.2	0.56	1.12	2.18	12
2 LFW 30/50	SHT	30	105	0.025	0.052	42.7	0.46	0.92	1.37	10
2 LFW 32/50	SHT	32	70	0.025	0.034	64	0.41	0.82	0.99	9
2 LFW 34/50	SHT	34	42	0.025	0.021	106.8	0.36	0.72	0.67	8

Identification code

2	LFW	XX	/	XX
Number of wires	Long Flexible Wire	Conductor size (AWG)		Strand size (AWG)

(*) SPC: SILVER PLATED COPPER - (**) SHT: SILVER HARD TIN



LONG FLEXIBLE SHIELDED & JACKETED PAIRS

TYPE LFW xx/xx STK2


Insulation: FEP

Operating temperature: -60°C to +150°C

Voltage rating: 200 Vac

Standard colours (stock): white for FW 22/41 to FW 34/50, black or white for FW 26/44.

Other colours on request, see colour code page 3.

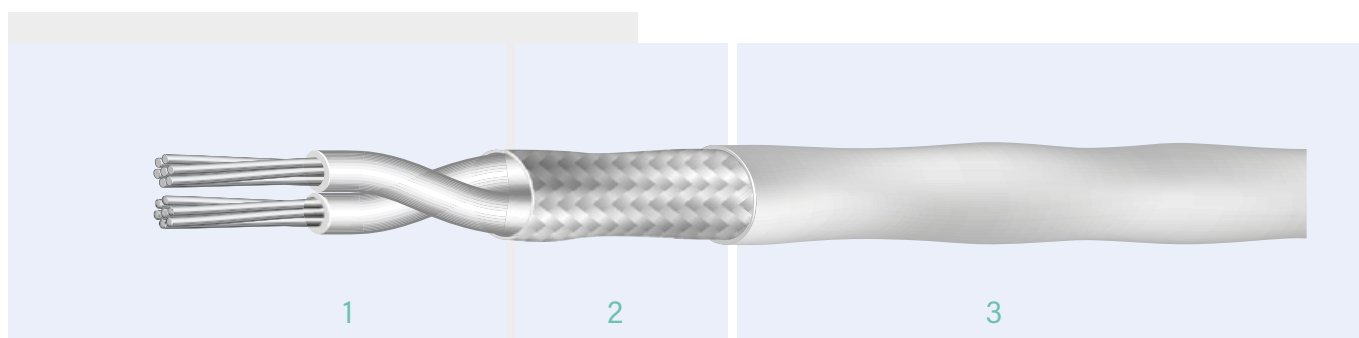

Construction

1. - Conductor: silver plated copper (SPC*) or silver plated copper alloy (SHT**)
- Insulated: thin wall extruded FEP
2. Shielding: silver plated copper & copper alloy
3. Outer jacket: thin extruded FEP

Physical characteristics

AXON' REFERENCE	PRIMARY WIRE		BRAIDED SHIELD		JACKET	
	Reference	Nominal Ø (mm)	Construction	Min. coverage %	Nominal outer Ø (mm)	Approx. weight (g/m)
LFW 22/41 STK2	LFW 22/41	0.91	16 x 8 x 0.05	80	2.20	10.30
LFW 24/44 STK2	LFW 24/44	0.78	16 x 7 x 0.05	80	1.94	8.24
LFW 26/44 STK2	LFW 26/44	0.66	16 x 6 x 0.05	80	1.68	5.74
LFW 28/48 STK2	LFW 28/48	0.56	16 x 5 x 0.05	80	1.48	4.57
LFW 30/50 STK2	LFW 30/50	0.46	16 x 4 x 0.05	80	1.28	3.31
LFW 32/50 STK2	LFW 32/50	0.41	16 x 4 x 0.05	80	1.18	2.89
LFW 34/50 STK2	LFW 34/50	0.36	16 x 3 x 0.05	80	1.08	2.18

Identification code

LFW	XX	/	XX	ST	K	2
Long Flexible Wire	Conductor size (AWG)		Strand size (AWG)	Standard braid	FEP	Number of wire

(*) SPC: SILVER PLATED COPPER - (**) SHT: SILVER HARD TIN

HIGH FLEXIBLE WIRES

AXON' PRODUCTS

- Connectors
- < Cables
- Cable assemblies
- Contacts
- Metal-plastic parts
- Elastomer components
- Fiber optic

CONTACT US

AUSTRALIA

AXON' CONNECT PTY LTD
TEL: +61 417 284 674
sales.australia@axon-cable.com

BRAZIL

AXON' CABLE IND. E COM. LTDA.
TEL: +55 21 3596-8002
salesbrazil@axon-cable.com

CANADA

AXON' CABLAGE INC.
AXON' WIRING INC.
TEL: +1 514-898-2044
sales@axoncable.com

CHINA

AXON' INTERCONNECT LIMITED
TEL: +86 757.2838.7200
sales@axon-interconnect.com

GERMANY

AXON' KABEL GmbH
TEL: +49-7152-97992-0
sales@axon-cable.de

HUNGARY

AXON' KÁBELGYÁRTÓ KFT.
TEL: +36 76 508 195
axon@axon-cable.hu

INDIA

AXON' INTERCONNECTORS
AND WIRES PVT LTD
TEL: +91 (0) 806 816 2966
sales@axon-cable.in

JAPAN

AXON' CABLE JAPAN OFFICE
TEL/FAX: +81 2 6217 6728
axon-japan@axon-cable.com

LATVIA

AXON' CABLE SIA
TEL: +371 6540 7891
axon@axoncable.lv

MEXICO

AXON' INTERCONEX, S.A. DE C.V.
TEL: +52 44 2215 2713
axon-mexico@axoncable.com.mx

SINGAPORE

AXON' CONNECT PTE LTD
TEL: +65 62 50 31 69
sales.singapore@axon-cable.com

SPAIN

AXON' CABLE SPANISH OFFICE
TEL: +34 911.30.91.23
axon-spain@axon-cable.com

UNITED KINGDOM

AXON' CABLE Ltd
TEL: +44 1383 421500
sales@axon-cable.co.uk

USA


AXON' CABLE INC.
TEL: +1 847 230-7800
sales@axoncable.com



HEADQUARTERS

AXON' CABLE S.A.S.
2 RTE DE CHALONS-EN-CHAMPAGNE
51210 MONTMIRAIL - FRANCE
+33 3 26 81 70 00
sales@axon-cable.com

FOLLOW US



axon-cable.com

[axon-cable](https://www.linkedin.com/company/axon-cable)

OUR WEBSITE



AGENT